

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/34, H04B 7/26</b>		A1	(11) International Publication Number: <b>WO 98/57512</b>
			(43) International Publication Date: 17 December 1998 (17.12.98)
(21) International Application Number: <b>PCT/SE98/01043</b>		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 2 June 1998 (02.06.98)			
(30) Priority Data: 08/874,988 13 June 1997 (13.06.97) US			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors: BODIN, Stig, Roland; Gribbyvägen 55, S-163 59 Spånga (SE). FRIED, Tomas; Hågavägen 25, S-164 54 Bromma (SE). SPORRE, Matts; Älta Mossväg 144, S-138 37 Älta (SE).			
(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).			
		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD FOR REPORTING MEASUREMENT INFORMATION IN A MOBILE COMMUNICATIONS SYSTEM

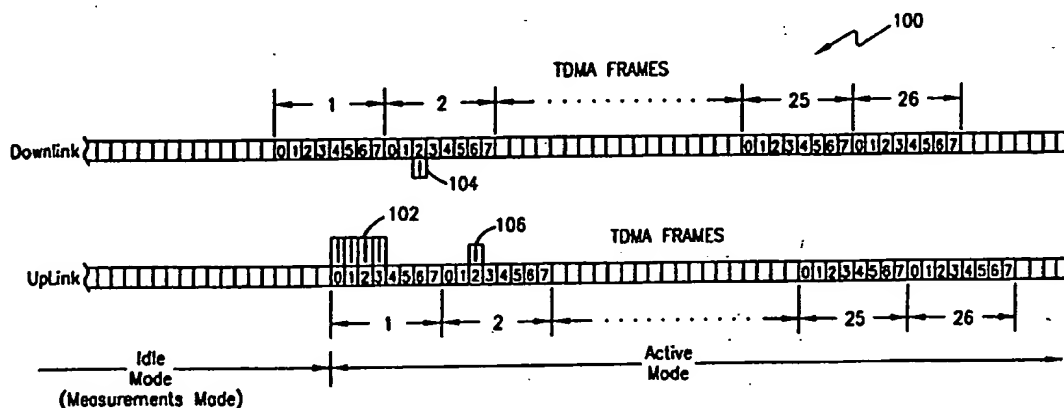

(57) Abstract

When a mobile terminal (12) first switches over from the idle mode (powered on and waiting to set up for a call) to the active mode (call connected), it starts sending measurement information to the network as soon as a dedicated traffic channel is assigned. In the preferred embodiment, the first measurement report is transferred to the network during the first available slow associated control channel period. That first report to the network contains data that the mobile terminal (12) obtained while it was waiting in the idle mode. During subsequent slow associated control channel periods, the mobile terminal (12) transfers measurement information to the network based on the data obtained in the active mode.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD FOR REPORTING MEASUREMENT INFORMATION IN A MOBILE COMMUNICATIONS SYSTEM

### 5 BACKGROUND OF THE INVENTION

#### Technical Field of the Invention

The present invention relates in general to the mobile telephony field and, in particular, to a method for use in improving measurement reporting in a mobile communications system.

#### 10 Description of Related Art

Given the advent of such complex, high-performance frequency allocation schemes as multiple reuse patterns (MRP) in mobile telephony systems, the frequency planning process has become increasingly arduous for mobile communications network operators. Consequently, in response to the growing need for automated frequency planning schemes, a new frequency planning algorithm for cellular communications systems called "Automatic Frequency Allocation" (AFA) has been developed by Telefonaktiebolaget L M Ericsson (publ). AFA is seen as a suitable technique for simplifying frequency planning, while still allowing operators to obtain system capacities that are very close to what can be obtained with manual MRP schemes.

20 Generally, AFA utilizes an iterative algorithm, which automatically and frequently reconfigures a network's cell plan (to minimize radio interference) and gradually improve the quality of the radio environment. The basic idea behind the AFA approach to frequency planning is that each cell in the network monitors the signal strength on all (or a subset of all) frequencies available to the operator. The signal strength measured on each frequency is utilized to estimate the interference that would be generated if that frequency were to be used. If any non-allocated frequency has a lower estimated interference than that of an allocated frequency, a frequency switch is made. Thus, the allocated frequencies with the highest interference are replaced by the frequencies with the lowest estimated interference. The AFA algorithm repeats this

- 2 -

procedure (iteratively) until no further improvement (in terms of the carrier-to-interference ratio or C/I) can be obtained.

Arguably, for frequency planning purposes, it is sufficient to measure signal strength on the uplink only, since these measurements would indicate generally those frequencies that carry traffic. However, there are at least two very important reasons why signal strength should also be measured on the downlink. First, for optimum frequency planning, the interference environment should be surveyed in the cells where most of the signal traffic occurs.

One technique that can be used is to measure the downlink interference at the base station that defines the cell. However, since this measurement is being made at only one point (e.g., where the measurement receiver's antenna is located), this lone reading is wholly inadequate from a testing and operational standpoint.

Another technique that can be used is to place interference measurement equipment at a number of different, fixed locations in a cell. Consequently, the downlink interference in the cell could be measured at all of those locations. However, this approach requires the purchase of a substantial amount of measurement equipment, which is quite costly to install and maintain. In fact, this added cost would outweigh the potential benefits that could be derived from making the downlink interference measurements at the numerous locations in the cell. As mentioned earlier, in order to obtain the best results with such a downlink measurement approach, the measurement equipment should be located where the majority of the cell traffic occurs, but the network operator typically does not have such knowledge beforehand.

Second, most of today's cellular communications systems utilize sectorized (uni-directional) cell antennas to improve network performance. However, uplink measurements that are made at a cell's base station do not detect traffic outside the base station antenna's sector. In other words, the radio interference created by mobile terminals located in the area behind that sector cell's base station antenna is not detected.

In the digital cellular Global System for Mobile Communications (GSM), the downlink measurements are required to be performed by the mobile terminals. Typically, there is ample time for the mobile terminals to conduct the downlink

- 3 -

measurements while operating in the idle mode, but the transfer of all of the terminals' measurement results to the base station should be accomplished in a manner so as to occupy as little of the system's resources (e.g., allotted frequency spectrum) as possible.

5        In existing cellular communications systems (e.g., GSM), signal strength measurements collected by a mobile terminal while operating in the idle mode are utilized by the mobile terminal only during the idle mode. On the other hand, measurements collected by the mobile terminal while operating in the active mode are transferred (reported) to the network during the active phase of the connection.

10       However, a problem with the existing systems is that the measurements collected by the mobile terminals in the idle mode are not reported to the network at all. In fact, until now, there has been no requirement for the mobile terminals to report their idle mode measurements to the network. Consequently, there has been no defined approach for the mobile terminals to use in order to communicate their idle mode

15       measurements to the network. Therefore, in order for the network to base any decisions about the radio environment on the downlink measurement data, the network has to use the measurement data reported by the mobile terminals operating in the active mode. This active mode measurement data is reported to the network primarily for the purpose of controlling handovers and regulating the power of specific radio

20       connections.

      A problem arises if the active mode measurement data is to be used for purposes other than handover control and power regulation, because conflicting requirements can be placed on the data to be collected. For example, the handover control function requires the use of downlink signal strength measurement data from

25       the neighboring cells that are immediately adjacent to the serving cell. On the other hand, the frequency allocation control function requires the use of downlink signal strength measurement data from distant neighbors. Such a conflict in the use of the downlink signal strength measurement data can lead to compromises in defining which cells to measure, which decreases the performance of both functions. An additional but

30       related problem is that a mobile terminal operating in the active mode does not have as much time to perform measurements as a mobile terminal operating in the idle mode.

- 4 -

Notably, if measurements performed by mobile terminals operating in the idle mode could be used by the network, there would be a greater degree of freedom available for the network operator to select the parameters to measure, since the mobile terminals would have much more time available to perform the measurements than they would in the active mode. However, it is currently not possible to transfer this measurement information to the radio network control entity, without introducing extra measurement report messages that would place an additional load on the air interface.

#### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to enable mobile terminals to transfer measurement information to the network without increasing the air interface load or reducing system performance.

It is also an object of the present invention to enable the use of downlink interference estimates based on signal strength measurements for automatic or adaptive frequency planning purposes.

It is yet another object of the present invention to enable a network to use information that was obtained by mobile terminals waiting in the idle mode.

It is still another object of the present invention to give a network operator more flexibility in selecting parameters to measure.

In accordance with the present invention, the foregoing and other objects are obtained by a method which enables a mobile terminal to switch over from the idle mode (powered on and waiting to set up for a call) to the active mode (call connected), and start sending measurement information to the network as soon as a dedicated traffic channel is assigned. In the preferred embodiment, the measurement data is transferred to the network on the slow associated control channel. The first report of measurement information, which is transferred to the network during the first available slow associated control channel period, contains data that the mobile terminal obtained while it was waiting in the idle mode. Subsequently, the mobile terminal transfers measurement information to the network based on the data obtained in the active mode.

- 5 -

## BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

5           FIGURE 1 is a block diagram of an exemplary mobile communications system that can be used to implement the present invention; and

          FIGURE 2 is a diagram that illustrates the downlink and uplink frame formats for a cellular communications system using a time division multiple access (TDMA) scheme, in accordance with the preferred embodiment of the present invention.

## 10       DETAILED DESCRIPTION OF THE DRAWINGS

The preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-2 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

          As described earlier, when a GSM mobile terminal first connects to the  
15       network, the mobile terminal has no prior knowledge about the timing of the slow associated control channel (SACCH) period. As such, GSM mobile terminals are frequently connected to their network near the middle of a SACCH period, and the measurements performed during the remainder of this period are thus incomplete. Consequently, the first measurement data reported to the network is not useful. As  
20       described below, mobile terminals operating in accordance with the present invention advantageously make use of the first complete SACCH period to provide useful measurement data to the network.

          Essentially, in accordance with the preferred embodiment of the present invention, when an active connection is first set up between a mobile terminal and  
25       network base station, the mobile terminal starts sending measurement reports to the network as soon as a dedicated channel is assigned. The measurement information is transferred to the network on the slow associated control channel. The first measurement report, which is transferred to the network during the first complete slow associated control channel period on the dedicated channel, contains measurement data  
30       that the mobile terminal obtained while it was waiting in the idle mode. During the

- 6 -

subsequent slow associated control channel periods, the mobile terminal transfers measurement information based on data obtained in the active mode.

Specifically, FIGURE 1 is a block diagram of an exemplary mobile communications system 10 that can be used to implement the present invention. For this embodiment, the exemplary system (10) shown is the cellular GSM, but this example is for illustrative purposes only, and the invention is not intended to be limited to any particular mobile communications system. In fact, the inventive concept can also be applied to cover other telecommunications fields, such as, for example, satellite communications wherein a mobile terminal first makes an active connection on the uplink in a satellite communications system. Cellular system 10 can include a plurality of mobile terminals (exemplified by the one mobile terminal 12 shown), which communicate with a Base Transceiver Station (BTS) antenna 14 via a radio air interface. BTS antenna 14 defines the coverage of one cell in the mobile network of system 10. A plurality of BTSs (not explicitly shown) including BTS 14 is controlled by a Base Station Controller (BSC) 16, which controls such functions as handovers and channel assignments in the cellular network. A plurality of BSCs (not explicitly shown) are connected to a Mobile Services Switching Center (MSC) 18, which controls calls to and from other telephony and data communications systems (not explicitly shown), such as, for example, a Public Switched Telephone Network (PSTN), Integrated Services Digital Network (ISDN), Public Land Mobile Network (PLMN), Public Data Network (PDN), or one or more private networks. In the GSM, for example, if someone in a PSTN wants to call a GSM subscriber (12), the exchange in the PSTN connects the call to a gateway. If the gateway is realized in MSC 18, then MSC 18 is referred to as a Gateway MSC (GMSC). MSC 18 is connected to a Visitor Location Register (VLR) 20, which is a database that contains information about all of the mobile terminals (12) currently located in that MSC's area. MSC 18 is also connected to a Home Location Register (HLR) 22, which is the network's primary database. HLR 22 contains subscriber information, such as supplementary services and authentication parameters, and information about the location of the subscriber's mobile terminal (e.g., in which MSC area the mobile terminal currently resides).



- 7 -

Generally, in the GSM, signal strength measurements are made in both the idle mode (e.g., while the mobile terminal is switched on and moving around) and the active mode. The initial cell selection is made when mobile terminal 12 is first "powered on". At power on when entering the idle mode, mobile terminal 12 scans all radio frequencies allocated to the GSM, and calculates the average signal strength level for each of those frequencies. The mobile terminal tunes to the strongest (highest average level) carrier and determines whether it is a Broadcast Control Channel (BCCH) carrier. In the GSM, the mobile terminal determines this by searching for the frequency correction burst, which is sent in time slot "0" on the BCCH carrier. If the strongest carrier is a BCCH carrier, the mobile terminal attempts to synchronize to this carrier and read the BCCH data (e.g., system information messages). If the mobile terminal can decode the BCCH data successfully and the data indicates that the cell is suitable, then the mobile terminal locks onto or "camps on" this cell. In the GSM, a cell is "suitable" if: (1) the cell belongs to the PLMN selected; (2) the cell is not barred from access; and (3) the path loss criterion, C1, is larger than "0". Otherwise, the mobile terminal tunes to the second strongest carrier, and so on, to search for a suitable cell.

Also, while in the idle mode, the mobile terminal (12) stays in a "sleep" mode, except when it is scheduled to listen for paging messages (or decode the BCCH information). In the GSM, all system information messages conveyed on the BCCH are read at least once every thirty seconds, in order to monitor changes in cell parameters (e.g., the cell might have become barred in the meantime). While listening to its own paging group for paging messages, the mobile terminal (12) takes measurement samples on certain frequencies allocated to predefined neighboring cells. In the GSM, the mobile terminal is required to take at least five measurement samples for each predefined neighboring cell. As such, the network transmits (e.g., via BTS antenna 14) a BCCH Allocation (BA) list on the BCCH, which informs mobile terminal 12 about which BCCH carriers it is to monitor (the predefined neighboring cells) for cell re-selection purposes. Mobile terminal 12 attempts to check the Base Station Identity Code (BSIC) for each of the six strongest of the predefined neighboring cells at least once every thirty seconds, in order to confirm that it is still monitoring the same cells. If the mobile terminal detects a change in a BSIC for a particular cell, then that

- 8 -

carrier is treated as a new carrier and the BCCH data for that new carrier is redetermined. While in the idle mode, the mobile terminal maintains an updated list of the six strongest neighboring cells, based on the signal strength measurements made.

FIGURE 2 is a diagram that illustrates the downlink (network side) and uplink (mobile terminal side) frame formats for a cellular communications system using a TDMA scheme, in accordance with the preferred embodiment of the present invention. For the sake of clarity and to facilitate understanding the invention, the exemplary frame formats shown in FIGURE 2 are described with respect to the standard GSM protocol, but the invention is not intended to be so limited. The invention can also be applied to any other type of cellular communications system that utilizes a TDMA scheme and mobile-assisted measurement procedures, such as, for example, the Advanced Mobile Phone Service (AMPS), Digital-AMPS (D-AMPS), Personal Digital Cellular (PDC) System, Personal Communications System (PCS), etc.

Referring to FIGURES 1 and 2, and in accordance with the present invention, the mobile terminal 12 (and other mobile terminals in the system) make, at a minimum, signal strength and quality measurements for its own cell, and at least signal strength measurements for neighboring cells while in the idle mode. The mobile terminal averages these measurements and stores the measurement information and averages in a local memory location. In this embodiment (e.g., in the GSM), the MSC 18 initiates a call by sending a set up message to the mobile terminal (12). If the mobile terminal can handle the call, it sends a call confirmed message back to the MSC. The MSC (18) then initiates a procedure to assign a dedicated traffic (e.g., speech) channel to the mobile terminal (12). The BSC 16 selects an unused traffic channel and sends a Channel Activation message to the BTS 14, which responds by sending a Channel Activation Acknowledge message back to the BSC 16. The BSC 16 then sends an Assignment Command message (on the Stand-alone Dedicated Control Channel or SDCCH) to the mobile terminal 12 (via the air interface), which directs the mobile terminal to switch to the new traffic channel. In the GSM, this new traffic channel, which is to be dedicated for use by this particular mobile terminal (12), typically includes a dedicated traffic channel (TCH), a slow associated control channel or SACCH, and a fast associated control channel (FACCH). A SACCH is a data channel

- 9 -

associated with either a particular TCH or SDCCH and that continuously carries information. A FACCH is also associated with a particular TCH and works in the "burst-stealing" mode to replace speech or data traffic with signalling information.

5 In accordance with the present invention, as soon as the dedicated channel has been assigned and the connection between the mobile terminal 12 and BSC 16 has been set up, the mobile terminal transfers the stored measurement data (collected earlier while in the idle mode) to the network immediately during the next complete SACCH period (denoted by 102) on the dedicated traffic channel. As shown in this example, the GSM format typically utilizes a duration of four SACCH time slots to completely transfer measurement data. However, the invention is not intended to be so limited and can utilize more or less time slots than the four SACCH time slot duration shown (i.e., systems other than the GSM may use different time slot durations). Subsequently, after the idle measurement information has been transferred on the uplink (102), the mobile terminal (12) then begins to make measurements for reporting in the active mode.

15 For example, in the GSM, during the active mode time period denoted by 104, the mobile terminal 12 receives and measures the signal strength for its serving cell. During the active mode time period denoted by 106, the mobile terminal transmits the active mode signal strength measurement for its serving cell on the SACCH. Similarly, the mobile terminal then measures signal strength for at least one of the neighboring cells and stores that information for a subsequent transmission. The active mode measurements are continued thereafter for the duration of the call.

20 In one aspect of the preferred embodiment, the measurements made by mobile terminals in the idle mode can be used for automatic frequency planning. For example, as described earlier, AFA is an automated frequency planning technique that utilizes an iterative algorithm to automatically and frequently reconfigure a network's cell plan (to minimize radio interference) and gradually improve the quality of the radio environment. Basically, using an AFA approach, the uplink and downlink signal strengths for all available frequencies are monitored for each cell in the network. The measured signal strength on each frequency is used to estimate the interference generated if that frequency were to be used. If any non-allocated frequency has a lower estimated interference than an allocated frequency, the network switches over from the

25

30

- 10 -

allocated to the non-allocated frequency. The allocated frequencies with the highest interference are replaced by the frequencies having the lowest measured signal strength, and so on until no additional improvement in performance can be made. In accordance with the invention, the uplink measurements are made at the base stations, but the  
5 downlink measurements can now be made by the mobile terminals in the idle mode, which provides ample time to make an appropriate number of measurements.

As such, the mobile terminals can be ordered to make idle mode measurements in accordance with a specific procedure. For example, in the GSM, a list similar to the BA list of frequencies to be measured is broadcast to the mobile terminals. The mobile  
10 terminals can note those frequencies and make the required measurements while waiting in the idle mode. Alternatively, the idle mode measurement frequencies can be relayed to the mobile terminals by being "piggy-backed" on various signalling messages, such as, for example, one or more Location Updating messages.

In another aspect of the preferred embodiment, by measuring the downlink  
15 signal strength on any given BCCH carrier and "listening" for the corresponding BSIC, the invention makes it possible to detect the allocation of a "bad" BCCH. For example, if one or more mobile terminals are unable to decode the BSIC for a particular allocated BCCH, and the measured signal strengths are high for that BCCH, then the BCCH frequency can be assumed to have high interference and not suitable for use.  
20 Also, if the mobile terminals decode a BSIC for a BCCH other than the one anticipated, a problem with the BSIC allocation is indicated. Notably, if there is high enough interference on a BCCH such that the mobile terminals cannot decode the BSIC, this problem will not be recognized in the active mode measurement reports even if the signal strength is high. A similar problem exists if the BSIC can be decoded  
25 for a BCCH, but the signal strength is too weak for the measuring mobile to include that measurement in the active mode measurement reports to the network (where only the six strongest frequencies with decoded BSICs are included). Furthermore, similar to the problem of recognizing the allocation of a "bad" BCCH, if the signal strength measurement recorded for a BCCH carrier is strong, but the mobile terminals are  
30 unable to decode the BSIC, then the cell corresponding to that BCCH is not suitable to use as a neighboring cell. Consequently, these problems can be solved by sending

- 11 -

measurement reports to the network based on the measurements made by the mobile terminals while waiting in the idle mode.

5        Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

- 12 -

## WHAT IS CLAIMED IS:

1           1.       A method for use in reporting measurement information in a TDMA  
2       mobile communications system, comprising the steps of:  
3           at least one mobile terminal of a plurality of mobile terminals measuring a  
4       plurality of downlink signal parameters while operating in an idle mode;  
5           switching said at least one mobile terminal of a plurality of mobile terminals to  
6       an active mode; and  
7           said at least one mobile terminal of said plurality of mobile terminals  
8       transmitting report information associated with said plurality of downlink signal  
9       parameters in a first available uplink data channel.

10           2.       The method according to Claim 1, wherein said plurality of downlink  
11       signal parameters comprises a plurality of downlink signal strength parameters.

12           3.       The method according to Claim 1, wherein said first available uplink  
13       data channel comprises at least one slow associated control channel.

14           4.       The method according to Claim 1, wherein said TDMA mobile  
15       communications system comprises a GSM.

16           5.       A system for use in reporting downlink measurement information in a  
17       TDMA mobile communications system, comprising:  
18           at least one mobile terminal operable to measure a plurality of downlink signal  
19       parameters in an idle mode;  
20           switching means for switching said at least one mobile terminal to an active  
21       mode; and  
22           said at least one mobile terminal including transmitting means for transmitting  
23       report information associated with said plurality of downlink signal parameters in a first  
24       available uplink data channel.

- 13 -

1           6.     The system according to Claim 5, wherein said plurality of downlink  
2     signal parameters comprises a plurality of downlink signal strength parameters.

3           7.     The system according to Claim 5, wherein said first available uplink data  
4     channel comprises at least one slow associated control channel.

5           8.     The system according to Claim 1, wherein said TDMA mobile  
6     communications system comprises a GSM.



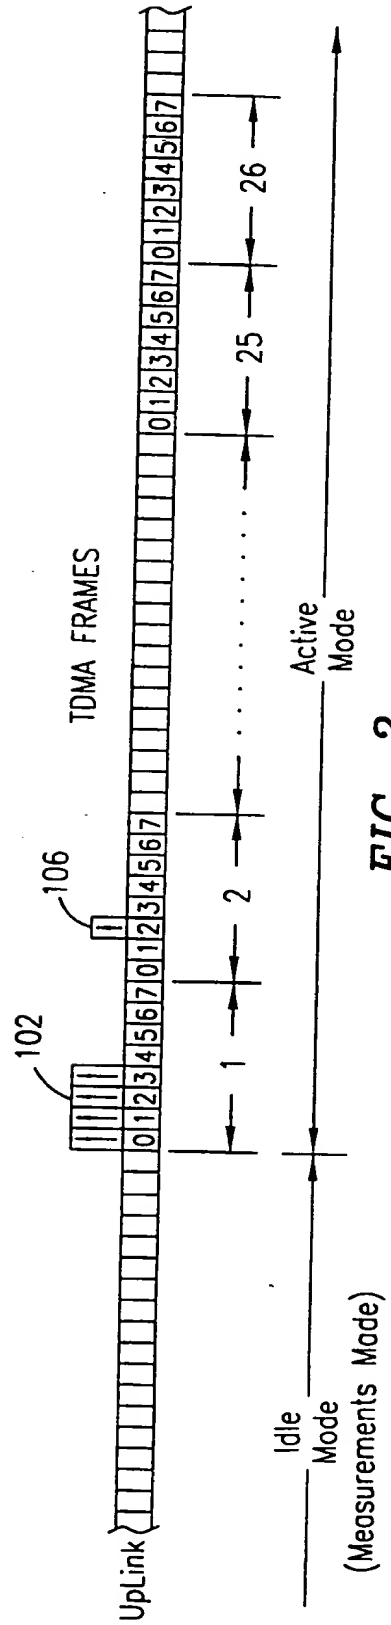


FIG. 2

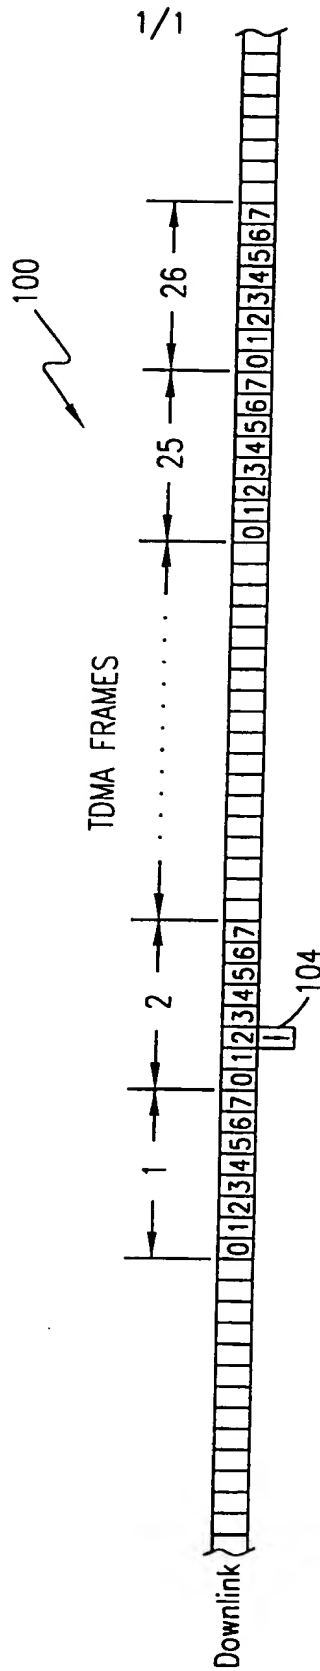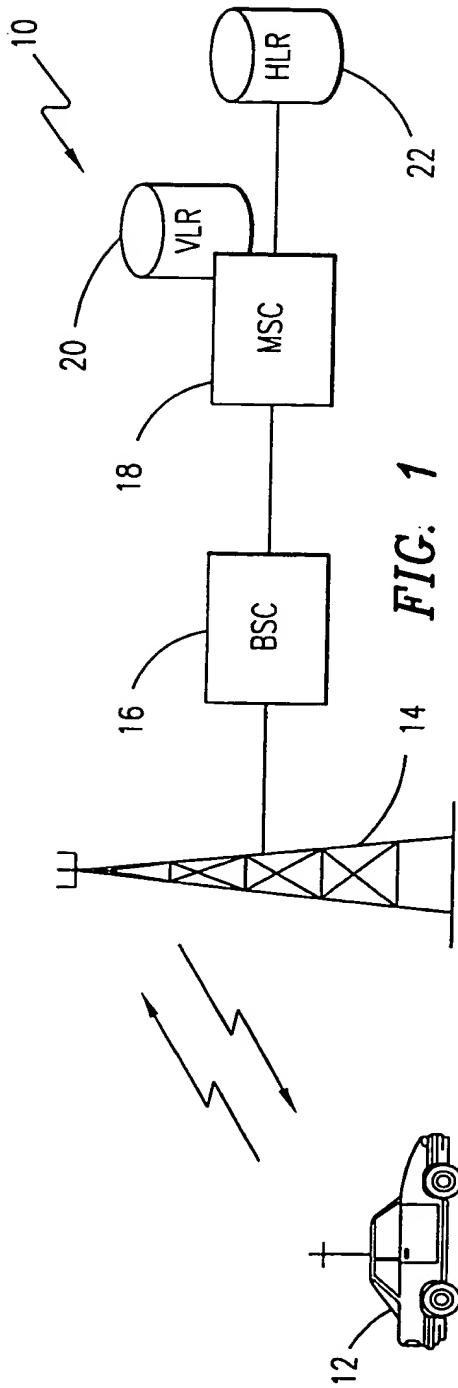

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01043

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04Q7/34 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 594 949 A (ANDERSSON CLAES H ET AL) 14 January 1997	1,2,5,6
Y	see column 5, line 66 - column 7, line 7; claims 12,13,18,20-23 ---	3,4,7,8
Y	US 5 491 837 A (HAARTSEN JACOBUS C) 13 February 1996 see column 5, line 19 - line 37 see column 5, line 50 - line 57 see column 6, line 66 - column 7, line 4 see column 9, line 36 - line 56 see column 10, line 7 - line 19 ---	3,4,7,8
Y	WO 96 21998 A (NOKIA TELECOMMUNICATIONS OY ;POSTI HARRI (FI)) 18 July 1996 see page 2, line 23 - line 31 see page 4, line 15 - page 5, line 6 -----	3,4,7,8

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**\* Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

6 October 1998

Date of mailing of the international search report

13/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gerling, J.C.J.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01043

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5594949	A	14-01-1997	US 5375123 A	20-12-1994
US 5491837	A	13-02-1996	AU 689567 B	02-04-1998
			AU 2091695 A	25-09-1995
			CA 2162256 A	14-09-1995
			CN 1127059 A	17-07-1996
			EP 0697163 A	21-02-1996
			FI 955326 A	03-01-1996
			JP 9500778 T	21-01-1997
			WO 9524810 A	14-09-1995
WO 9621998	A	18-07-1996	FI 950047 A	05-07-1996
			AU 4348796 A	31-07-1996
			CN 1168214 A	17-12-1997
			EP 0801872 A	22-10-1997
			NO 973094 A	03-09-1997